



## NOTICE OF INTENDED INSTALLATION AND USE


THE ROSEN MULTI-MEDIA NAVIGATION SYSTEMS CONTAIN AN INTERNAL VIDEO PLAYER, WHICH IS NOT INTENDED FOR VIEWING BY THE DRIVER. THE VIDEO PLAYER IS DISABLED WHEN THE VEHICLE IS IN MOTION THROUGH A CONNECTION TO THE PARKING BRAKE.

#### THE INSTALLER OF THIS PRODUCT MUST INSURE THE VIDEO DISABLE CONNECTION IS WORKING PROPERLY PRIOR TO DELIVERY OF THE VEHICLE.

IMPROPER INSTALLATION COULD DISTRACT THE DRIVER OR INTERFERE WITH SAFE OPERATION OF THE VEHICLE, WHICH COULD RESULT IN SERIOUS INJURY OR DEATH, AND COULD ALSO VIOLATE STATE AND/OR FEDERAL LAW.

ROSEN ENTERTAINMENT SYSTEMS DISCLAIMS ANY LIABILITY FOR ANY BODILY INJURY OR PROPERTY DAMAGE THAT MAY RESULT FROM ANY IMPROPER OR UNINTENDED INSTALLATION AND/OR USE.

STOP	<u>STOP</u> Damage to the vehicle may occur Do not proceed until process has been completed
CAUTION	<u>CAUTION</u> Process must be carefully observed in order to reduce the risk of damage to the accessory or vehicle
! CRITICAL	<u>CRITICAL</u> Process must be carefully observed in order to ensure a quality installation
o c	<u>TOOLS and EQUIPMENT</u> Specific tools and equipment recommended for this process
	<u>SAFETY RISK</u> Observe safe practices, this process can be dangerous and there is a risk of personal injury
	<u><b>TESTING and TROUBLESHOOTING</b></u> Content specific testing and troubleshooting points

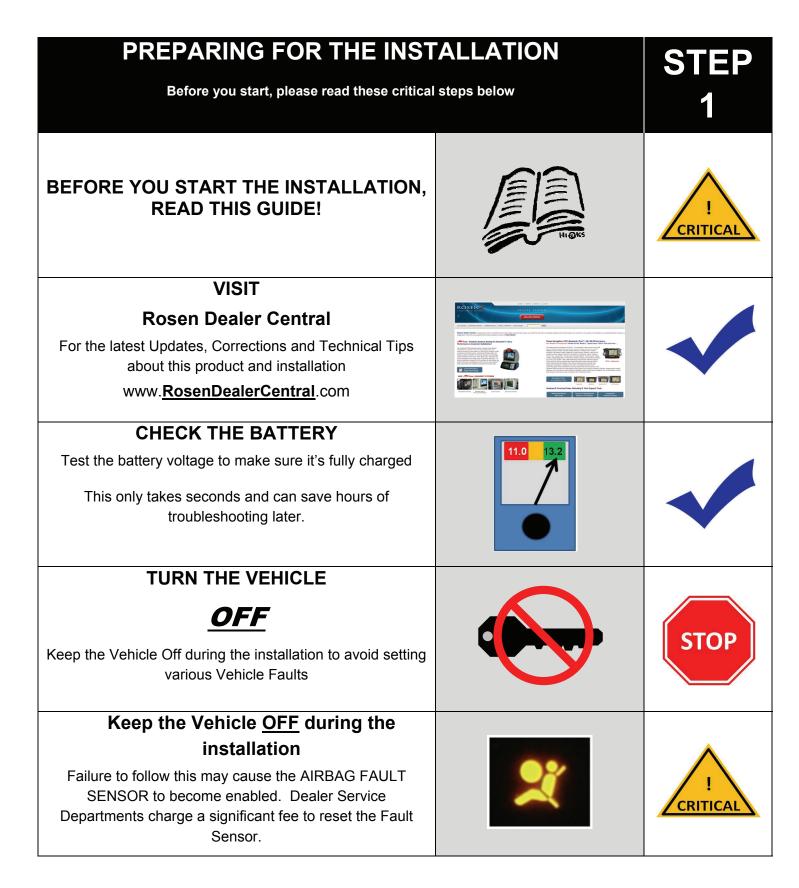

<b>REMOVE THE FACTORY</b> You will need to remove multiple interior trim components prior The following steps will help guide you through	STEP 2	
Remove Upper Dash/Vent Trim		$\wedge$
Use a thin pry tool to carefully lift the Upper grill. Use Caution, the plastic is fragile and excess force can break or damage trim		CAUTION
Remove the Inner Trim / Vent Components Remove 3 x T-20 Torx screws to release the inner Trim / Vent components.		C
Remove the Radio Surround Trim Remove 2 x T-20 Torx screws to release Radio Surround Trim		0
Remove the Radio Mounting Screws		
Remove 4 x T-20 Torx screws to release the radio		0
Remove OEM Radio from Dash and Unplug Factory Harness Carefully slide the radio out, and release the main connector block and antenna connectors		CAUTION

LOCATING REMOTE COM You will need to mount the GPS and Optional Satellite Radio A vehicle. And mount the iPod Interface Connector in the vehicle. you through this process.	STEP 3	
Use Caution around SRS Components It is the <u>installer's responsibility</u> to ensure that the safety equipment in the vehicle is <b>NOT</b> adversely affected by installation of this system. Ensure that the routing of the harnesses do NOT obstruct airbags, SRS or other safety devices.	X	STOP
Mount the GPS and Sat Radio antenna in a location on the exterior of the Vehicle         Route the GPS harness away from other power harnesses in the vehicle.         This will help to ensure optimum performance of the GPS system.		! CRITICAL
Install the iPod interface connector in a location accessible to the end-user Locate the iPod interface module in an area which can be serviced in the future. The iPod cable is intended to be a serviceable item, which plugs into the iPod/Sat radio Interface Module.		! CRITICAL

You will need to prepare the Rosen Navigation System for	STEP	
		4
Remove the DVD Transport Screws There are 2 x Phillips Transport Screws which protect the DVD Mechanism during transportation. Transport Screws must be removed prior to installation.		STOP

Rosen Entertainment Systems Installation Guide Copyright 2010 All Rights Reserved DP-VW0714HD Rev E


Connect the Power and GPS Harnesses		
The GPS Harness must be tightened with a WRENCH to ensure it is properly seated. Failure to follow this step may result in poor GPS signal		0
Connect Optional Harnesses such as iPod, Satellite Radio, Camera, Reverse Sensors These harnesses must be fully engaged prior to the system installation. See the Harness Diagrams for more information		! CRITICAL
Prepare the Vehicle side harnesses for connection to the Rosen Harness         Use care not to pinch or damage cables as this will cause performance issues/failures		CAUTION
Engage all Connectors to the Factory Harnesses and attach the Rosen System using the previously removed Mounting Screws Attach the system with 4 x T-20 Torx Screws		0
Turn the vehicle ON and confirm the unit is fully operationalWith the connectors <a href="#">Fully Engaged</a> , turn the vehicle on and press the <a href="#">RESET</a> for 5 seconds on the unit.		
Insert a DVD to confirm the Video Disable Circuit is properly Operating. The Video Disable is provided by the CANBus in most VW vehicles. However, in some vehicles the Brake Wire must be connected to the Park Brake Indicator Wire to complete a	<u>Notice</u> Some features are not intended for viewing by the Driver while the vehicle is in motion. For further details, please refer to the Owner's Manual	STOP

RE-INSTALL THE TRIM COMPONENTS You will need to reinstall all trim components		STEP 5
Reinstall all Trim Components in the reverse order from Step 2Prior to installing trim components, confirm that all clips are in good condition.Replace any broken or damaged trim components or clips		CAUTION
Install the Inner Trim / Vent Components Install 3 x T-20 Torx screws to attach the inner Trim / Vent components.		O
Install the Upper Trim / Vent Component Use caution when installing the Upper Trim / Vent Component as it can easily be deformed or damaged.		CAUTION

ENABLE INSTALLER SE	STEP	
You will need to select certain Installer Setting based on any Option installed	6	
<ul> <li>Launch the Installer Setting Screen</li> <li>From any screen with the Menu Button, follow these steps to display the Installer Setting Screen, select: <ol> <li>From any Screen, select "Menu"</li> <li>From the Menu Screen, select "Settings"</li> <li>Press "Keypad," Press "7253" and "Enter"</li> </ol> </li> </ul>	MENU       FM2       103.7       Mhz       >>         Stand for       C Rock       C Rock       103.7       Mhz       PRESET       103.7       Mhz       Nhz       Nhz <td< th=""><th>! CRITICAL</th></td<>	! CRITICAL

# Select the individual Settings as needed for the installed components

Selectable options vary by product and installation. Select the options as applicable for the installed optional components.




Perform Pre-Delivery	STEP	
You will need to perform several Pre-Delivery Tests to er	isure customer satisfaction	7
Turn the vehicle ON and System ON         Confirm the unit starts up properly <u>Troubleshooting</u> 1) Reset the System while the Vehicle is ON         2) Confirm all connectors are properly installed         3) Check the Vehicle and System Fuses	R O S E N Č	
Select RADIO as the Source         Confirm that the AM and FM reception are as expected <u>Troubleshooting</u> 1) Confirm both Antennas are properly connected.         2) Confirm the Factory Sat Antenna (green) has not been used         3) Reset the System	MENU     FM2     103.7     Mhz     >>       Stand for     C Rock       103.7     Mhz     PRESET       103.7     Mhz     103.7       AM/FM     SAT     IPOD     CD	
<ul> <li>Select SATELLITE RADIO as the Source Confirm Channel 001 is present after ~5 minutes</li> <li><u>Troubleshooting</u></li> <li>1) Confirm the SAT Radio is Turned ON in the Installer Settings</li> <li>2) Confirm the antenna has unobstructed view of the Sky</li> <li>3) Confirm the antenna is located on the outside of the vehicle</li> </ul>	MENU     Classic Rock       Classic Rock     Classic Rock       Stairway to Heaven     Led Zeppelin       Big Tracks     Hair Nation     Boneyard       Classic Rewind     The Pulse     Soul Town       AM/FM     SAT     IPOD     DVD     MP3	
Select iPOD as the Source (if Equipped)         Confirm iPod is communicating a playback is OK <u>Troubleshooting</u> 1)       Confirm iPod Version Compatibility – not all are compatible         2)       Confirm the harnesses are properly engaged         3)       Reset the System	MENU Shuffle Repait Scan Keypad U MENU Now Playing 005/030 Artist: Michael Jackson Album: Thriller Times: 02:17 Status: Play AM/FM SAT IPOD CD DVD MP3 PHONE	

Select CD as the Source		
Confirm CD audio playback is OK	MENU 10:22 PM Track 03 3:20 Classic U	
The block of		
Troubleshooting	Random Repeat	
1) Confirm the Disc is Store Bought and in good condition	Scan Copy	
2) Reset the system	AM/FM SAT IPOD CD DVD AUX PHONE	
Select DVD as the Source		
Confirm DVD video playback is OK	MENU 10:22 PM Track 03 3:20 4	
<u>Troubleshooting</u>	Repeat Setup	
1) Ensure the Park Brake is set to view video	Lang Titles Root CT	
2) Confirm the Disc is Store Bought and in good condition	AM/FM SAT IPOD CD DVD AUX PHONE	
3) Reset the system		
Select MP3 as the Source		
Confirm MP3 playback is OK – Select Favorites	[MENU] [TA] - PTY [ ] AF	
	<< Track 1 >>>	
Troubleshooting	Track 1 Track 2 Empty	
1) Confirm that a Test Track exists in the Favorites Folder	Empty Empty Favorites	
2) Reset the system	AM/FM SAT IPOD CD DVD MP3 PHONE	•
Select Phone as the Source		
Confirm Phone Pairing is successful	MENU Tag u	
	1 2 ABC 3 DEF	
Troubleshooting	4 GHI 5 JKL 6 MNO ← Call ← End → ←	
1) Confirm the Phone has BT and is in discoverable mode	Redial Switch Clear * Daws # Ever	
2) Confirm the Phone is compatible with the system	AM/FM SAT IPOD CD DVD AUX PHONE	
3) Reset the system		
Select NAV as the Source		
Confirm the Navigation loads and signal strength is OK	7m 7th Ave w41st St	
	W 43rd St Times Square 20	
Troubleshooting	240m W 14th St Detour	
1) Confirm the antenna has an unobstructed view of the sky	3:09 11 km/b	
<ul><li>2) Confirm the antenna is located on the outside of the vehicle</li></ul>		
<ul><li>3) Confirm the antenna connection is properly tightened</li></ul>	smm ** 547 7th Ave 7501 St 646	
Select Reverse Camera (If Equipped)	Wanited	
Confirm the backup camera screen shows in reverse	Always checklyour surroundings before backing your vehicle	
Troubleshooting	aver the	
	600	
,	· · · · · · · · ·	
<ol> <li>Confirm the Reverse Trigger wire is attached properly</li> <li>Confirm the Camera is receiving 12VDC as required</li> </ol>		


## Service and Optional Parts List

Part Number	<b>Description</b>	Part Number	Description
DP-VW0711 DP-VW0714 DP-1001 DP-1003 DP-1004 DP-1023 DP-1020-H11 DP-1022 DP-1042 DP-1035 DP-1055	Quick Reference Guide Installation Guide Manual, Owner's Manual, Navigation Remote Control Pin, Stylus Card, SD w/ maps Antenna, GPS XM/iPod Multimedia Kit Camera, Cylinder W/Mount Sirius/iPod Multimedia Kit	DP-VW0712 DP-1007 DP-1008 DP-1009 DP-1010 DP-1011 DP-1013 DP-1015 DP-1051 DP-1047 DP-1030	Harness, Main Interconnect Harness, USB Adaptor Harness, AUX Out Harness, AUX IN Harness, Sensors/Camera Harness, Dolby 5.1/Amp Harness, iPod/Interface Box Harness, iPod Replacement Harness, Sirius Interface GPS Antenna Windshield Mount Sensors, Reverse Kit
DF-1000	Sinus/Pou Multimedia Kit	DF-1030	Sensors, Reverse Kil

### Main Harness Diagram

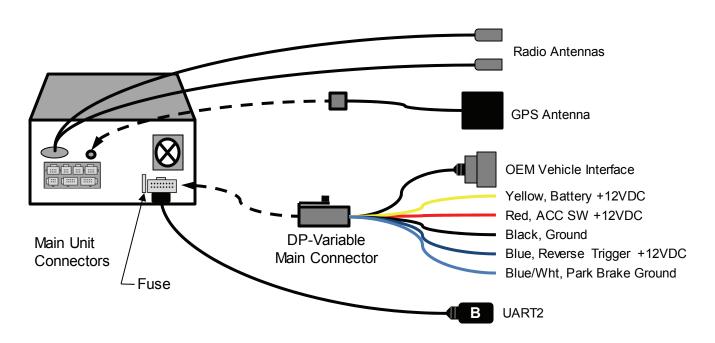

### **Option Harness Diagram**

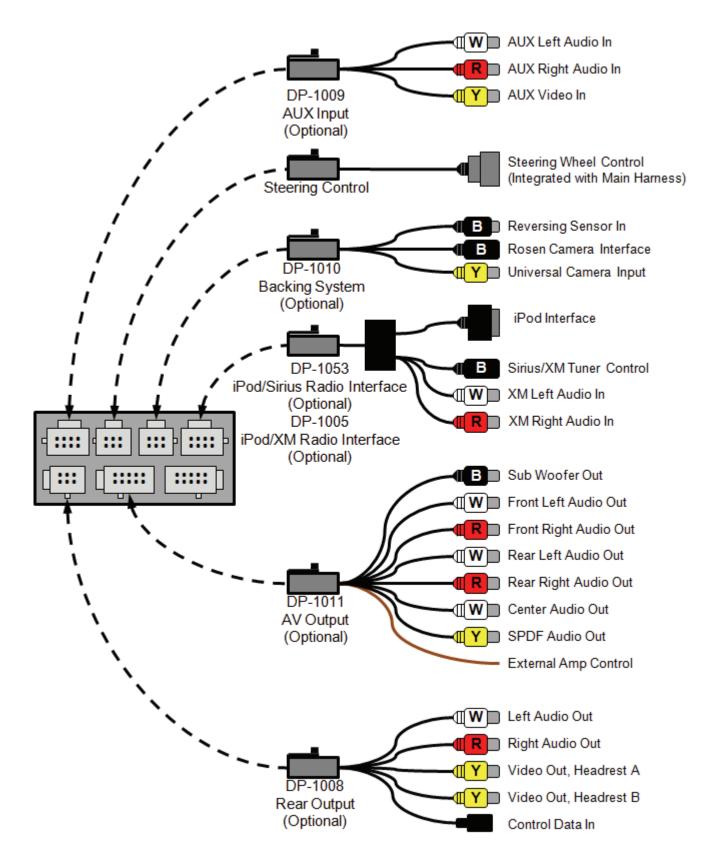

Copyright 2010 All Rights Reserved DP-VW0714HD Rev E